




Cleanaire PreCleaners - Metal

- Reduce operating costs
- Increase filter life
- Improve fuel efficiency
- Reduce emissions
- Increase engine life

Airflow range 3 CFM to 2000 CFM (can be manifolded for greater CFM requirements)


Applications: all vertical and horizontally mounted air cleaners used for on / off highway applications.

Engine precleaners are designed to remove most of the contaminants from the air that feeds the engine. As well as extending filter life - turbochargers, blowers, cylinder liners, piston rings and lubricating oil are protected from the extreme wear caused by contaminant reaching the engine.

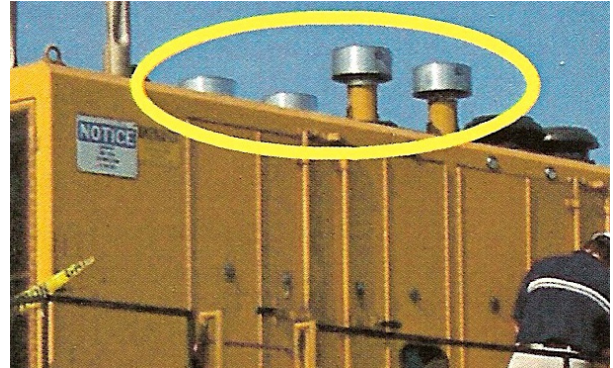

- Stainless steel rotor
- Cast aluminum body
- Polished aluminum hood
- Dual sealed ball bearings

Lifetime Warranty

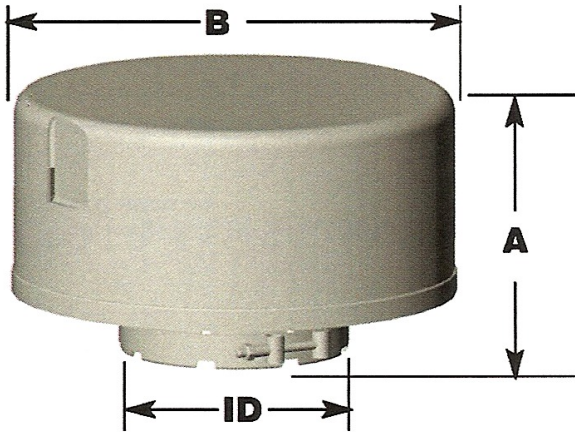

Model	Size ID	CFM*	A	B	WT.
200	2.00"	20 - 100	3.125"	4.750"	2 lb
255	2.50"	100 - 200	4.250"	6.000"	3 lb
330	3.00"	140 - 350	4.750"	8.250"	5 lb
440S	4.00"	140 - 350	4.750"	8.250"	5 lb
445	4.50"	300 - 600	7.125"	10.625"	8 lb
550	5.00"	300 - 600	7.125"	10.625"	8 lb
660S	6.00"	300 - 600	7.125"	10.625"	8 lb
660	6.00"	400 - 850	7.125"	12.250"	9 lb
770L	7.00"	500 - 1400	7.250"	14.125"	11 lb
880	8.00"	500 - 1400	7.250"	14.125"	11 lb
990	9.00"	900 - 2000	8.125"	17.125"	14 lb

CAUTION

Pre-cleaner selection must be based on engine airflow specifications - not on inlet tube diameter.

* CFM = cubic feet of air per minute